



**C2G**<sup>®</sup>  
A brand of **legrand**<sup>®</sup>

## DATA SHEET

---

### USB-C<sup>®</sup> to DisplayPort<sup>™</sup> Adapter Converter - 4K 60Hz

Ideal for showing presentations, pictures, or other audio/video content from the USB-C port of a laptop or tablet to the DisplayPort input of a monitor, projector, or HDTV.

#### OVERVIEW

This USB-C to DisplayPort Adapter Converter is ideal for showing presentations, pictures, or other audio/video content from the USB-C port of a laptop or tablet to the DisplayPort input of a monitor, projector, or HDTV. This adapter supports up to a 4K (3840 x 2160) at 60Hz resolution, allowing it to deliver a high-quality video image to the connected display. The compact design of this adapter makes it perfect for BYOD (Bring Your Own Device) applications in education or corporate environments. This adapter is an ideal accessory for Apple<sup>®</sup> and other leading laptops and tablets.

#### FEATURES

- Supports resolutions up to 4K (3840 x 2160) at 60Hz
- Compatible with USB-C, Thunderbolt<sup>™</sup> 3 and Thunderbolt<sup>™</sup> 4 ports
- A reversible, symmetrical USB-C connector
- Compact, lightweight design
- Plug and Play—no driver required
- Compatible with the Apple<sup>®</sup> MacBook<sup>®</sup>, MacBook Air<sup>®</sup>, and MacBook Pro<sup>®</sup>

ITEM	DESCRIPTION
C2G26933	USB-C <sup>®</sup> to DisplayPort <sup>™</sup> Adapter Converter - 4K 60Hz - Black
C2G26934	USB-C <sup>®</sup> to DisplayPort <sup>™</sup> Adapter Converter - 4K 60Hz - White


## ELECTRICAL SPECIFICATIONS

- Voltage: 30V
- Temperature Rating: 80°C
- Conductor Resistance: at 20°C Max 34AWG: 856.3 Ω/km
- Insulation Resistance: 10M-km Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 minute No breakdown (EIA-364-20)

- Chipset: IC VL100
- Jacket Rating: VW-1
- Overall Cable Dimension: 4.0mm, Black
- Minimum Bend Radius: 40mm
- Adapter Length: 100±15mm
- Molding: Black PVC
- Operating temperature: 0° - 45°C; 15-85% Relative Humidity (Non-Condensing)
- Storage temperature: -10°C - 70°C; 15-85% Relative Humidity (Non-Condensing)
- QC Inspection: 100% of Image Test: 3840 x 2160 @60Hz
- Product is CE Marked and conforms to 2011/65/EU RoHS2

## PHYSICAL CHARACTERISTICS

- Connector 1: USB Type-C 3.2 Male; Contacts: Terminal Gold Flash, Nickel Plated Shell, Black Insulation
- Connector 2: DisplayPort Female, Contacts: Terminal Gold Flash, Nickel Plated Shell, Black Insulation

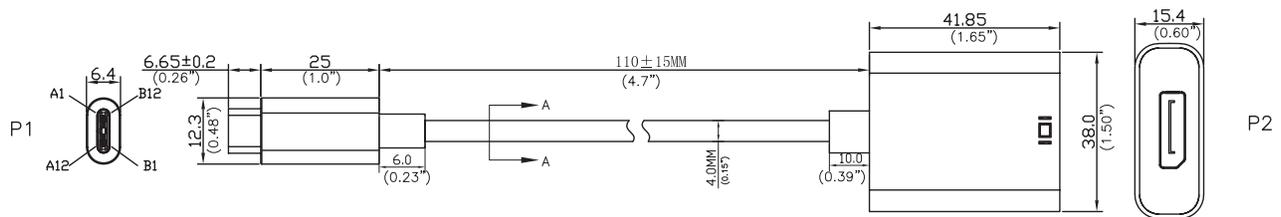

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

### SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2023 Legrand AV Inc. 220739 Rev B 8/23 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.